



**RST INSTRUMENTS LTD.**

## Snap Seal Inclinator Casing


Snap Seal inclinometer Casing comes complete with a machined male and female end and requires no glues, fasteners, or tools to join, seal, and align.

The fingers on the female end of the casing lock on to the ring on the male end to provide a strength of over 1200 lbs in tension. The O ring in the female end of the casing provides a positive seal for the joint.

To join the casing together, simply align the white button on the male end of the pipe with the wide slot on the female end.

Push the two sections of casing together, allowing all the fingers to snap into place, so that they are flush with the diameter of the casing.

A 2 inch wide water proof duct tape should then be applied over the joint. Just a single wrap of this tape will improve the lateral strength of the joint by more than 100% and in tension by 50%.

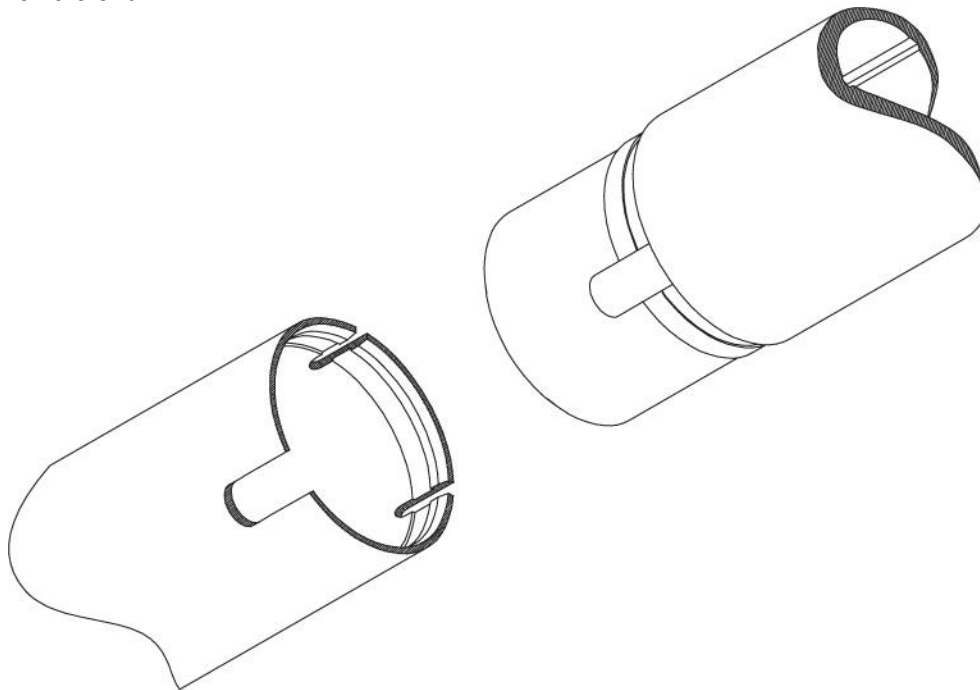

*For more complete installation information contact your local RST representative, or RST direct at 1-800-665-5599.*