










A data logger housed in a Square Lockable Enclosure (available for EP1311B only).



Locking Well Caps & Covers

RST Lockable Well Covers offer the ultimate in surface protection. Square design eliminates rotational removal while sturdy tabs allow security locks to be placed. The raised, angled lid allows casing to rise above the edge of the cover for increased access.


RST Bolt Down Flush Mount Welded Well Covers offer an economical way to provide traffic protection and help protect against water infiltration for monitor wells completed at grade. Each unit incorporates fully welded construction featuring a heavy duty steel skirt and 3/8 in. steel lid. A flat gasket is employed between the ring and cover as a water resisting seal. Two stainless steel bolts with nylon washers secure the lid in place.

> LOCKABLE ABOVE GRADE WELL COVER FEATURES

Warning label: "OBSERVATION MONITORING WELL DO NOT FILL" on each lid.

4" square X 1/8 in. wall X 4 ft. size accommodates 2" well pipe and 2.75" inclinometer casing.

8" plus data logger mount

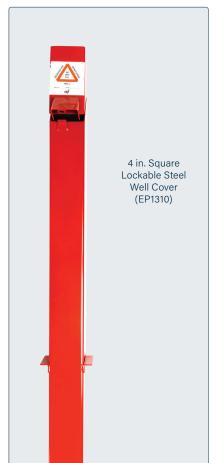

ORDERING INFO:	
ITEM	PART#
4 in. Square lockable steel well cover, powder-coated (red)	EP1310
8 in. Square lockable steel well cover, powder- coated (red) with subplate to house DT2011B and DT2055B data logger	EP1311B
8 in. Round flush mounted steel bolt down well cover, powder-coated (red)	EP1305

